

Model FL-1000

Standard Flow (0.75 gpm) optional 1.5 or 2.2 gpm flow (see back)
Fluoride Reduction Cartridge for home, office, business & more

Design Features

- Activated Alumina media for reduction of Fluoride not to exceed 4.0 mg/L in source water

Exclusive Patented Quick Change Cartridge

- Inlet & outlet ports sealed w/O-ring technology
- Sanitary quick change cartridge

Using any of our High Flow filter heads

Certified Performance

- Alwaysfresh cartridge has been tested to NSF/ANSI Std 53 for material safety by WQA Gold Seal program



Replacement Cartridge
PN# RC-FL-1000

Typical Applications: Point of Use treatment for drinking water residential & commercial



Waterline Technology's *i-Select*™ point of use filtration program can provide a treatment train to allow you to customize a treatment solution for your specific ingredient water needs. Just select any of the following cartridges with our Twin or Triple Series Filter Head assemblies and install as specified!



| Model # | Description |
|-------------|---|
| HF-20000 | : Chlorine, taste, odors, fine filtration & cysts reduction |
| HF-5000-BVC | : Microbiological purifier cartridge for microbiological issues facing most any water supply. |



| | |
|--------------|----------------------------------|
| HFC-1000: | Chloramines, VOC's, TTHM's, MTBE |
| SC12-RO-150: | Mineral reduction |

ALwaysFresh®
Water the way you want it®

©2009 Waterline Technology®
Protected under patents 6,695,891, 6,926,826, 6,977,006,
7,172,693, 7,476,314
and other Patents Pending

Model FL-1000

Standard Flow (0.75 gpm) optional 1.5 or 2.1 gpm flow (see below)
 Fluoride Reduction System for home, office, business & more



Operating Specifications


Min/Max working pressure: 30psi (.7 bar)/125 psi (8.6 bar), non shock
 Temperature: 35-100° F (2-38° C)
 Service flow rate 0.75gpm (2.85 Lpm)
 Rated Service Capacity: 500 gallons (1900 L)

Product performance is dependent upon incoming water conditions.
 Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Systems certified for cyst reduction may be used on disinfected waters that may contain filterable cysts.

See performance data sheet for individual contaminant's and reduction performance.


The contaminant's or other substances removed or reduced by this water filter device are not necessarily in your water.

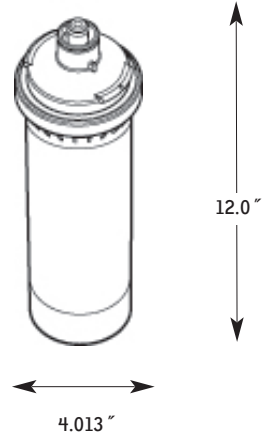

This cartridge is designed to fit Alwaysfresh high flow filter head Models HFH-38-NPT, HFH-38-QC or HFHV-38-QC, HFH-38QC-SS-xx

Typical Installation Options:

Suggest use of Filtered Cold water for supply with isolation valve on inlet line.

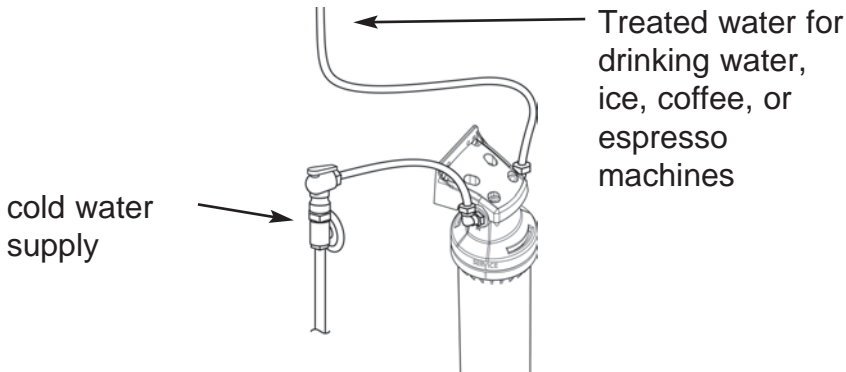

Warranty:

12 months from date of purchase or 24 months from date of manufacture. See warranty sheet for details

Now available for customers demanding > 0.75 gpm, (drinking water, ice, coffee, and espresso machines)

Use the Twin or Triple Filter parallel flow Heads to increase flow rate without reducing the performance.

Parallel Flow : TWIN Filter Head

Use RC-FL-1000 Cartridges in position #1 & #2

Performance remains the same as single RC-FL-1000

Flow increased to 1.5 gpm
 Capacity increases to 1000 gallons

Dimension rough in 13"w x 5.25" h x 4" d



Twin Filter Head Parallel Flow 1.5 gpm
 PN#HFH-38QC-SS-2P

Parallel Flow : TRIPLE Filter Head

Use RC-FL-1000 Cartridges in position #1, #2 & #3

Performance remains the same as single RC-FL-1000

Flow increased to 2.1 gpm
 Capacity increases to 1500 gallons

Dimension rough in 17.5"w x 5.25" h x 4" d



Triple Filter Head Parallel Flow 2.1 gpm
 PN# HFH-38QC-SS-3P



1206 W. CAPITOL DR. ADDISON, IL.
 60101 PH: 630-628-1330 / FX 630-628-3050
 SALES@PARGREEN.COM